



MOUNTING DIMS
ON CONCRETE
BASE PAD



View A
3:1

See View A

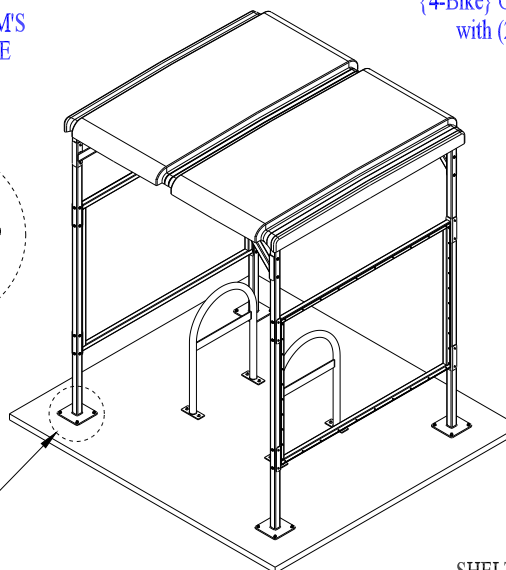

{4-Bike} Capacity Shelter
with (2) U-Racks



SHELTER CONTRUCTION IS COMPRESSION MOLDED SMC
FIBERGLASS TOPS WITH ABS SOFFETS, POWDER COATED
STEEL FRAMES & POLYCARBONITE SIDE PANELS


STANDARD COLORS ARE TAUPE FRAMES & SANDSTONE
TOPS & SOFFETS. OTHER COLORS AVAILABLE

SHELTERS ARE AVAILABLE IN (2) TOP & (3) TOP STARTERS
WITH ADDITIONAL (2) TOP & (3) TOP ADDERS COMBINED
TO CREATE UP TO A (24) TOP SHELTER BANK


(2) U-RACKS ARE 1.9" Ø SCHTL 40 STEEL BLACK PIPE
WITH BLACK POWDER COATING OR BLACK PLASTISOL

STAINLESS STEEL U-RACKS ARE ALSO AVAILABLE

SHIPPING WEIGHT IS 705 LBS. OR 320 KG.

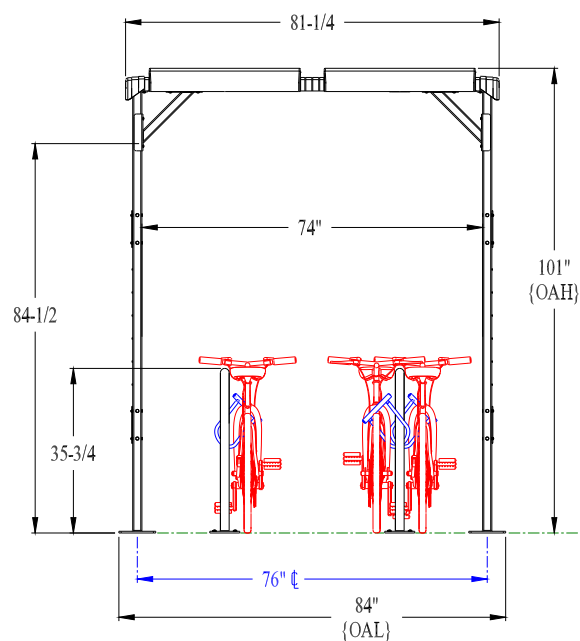

GROUND
LEVEL

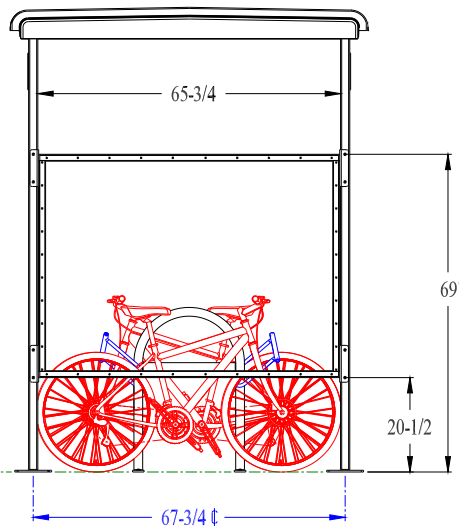

SHEET 1 OF 1	A	RELEASE FOR QUOTE	10/16/18
	REV	DESCRIPTION	DATE
TOLERANCES UNLESS OTHERWISE SPECIFIED: +/-	CYCLEPORT {2-TOP} ASSEMBLY {U-SHELTER}		
	BOB SLYH	10/16/18	Cycle Safe 5211 CASCADE ROAD - SUITE 210 GRAND RAPIDS, MI 49546 www.cyclesafe.com
	CHECKED	DATE	
	APPROVED	DATE	
	DATE	DATE	
ANG	D	{2-SIDE} POLYCARBONITE (U-RACKS)	REV A