



MOUNTING DIM'S
ON CONCRETE
BASE PAD



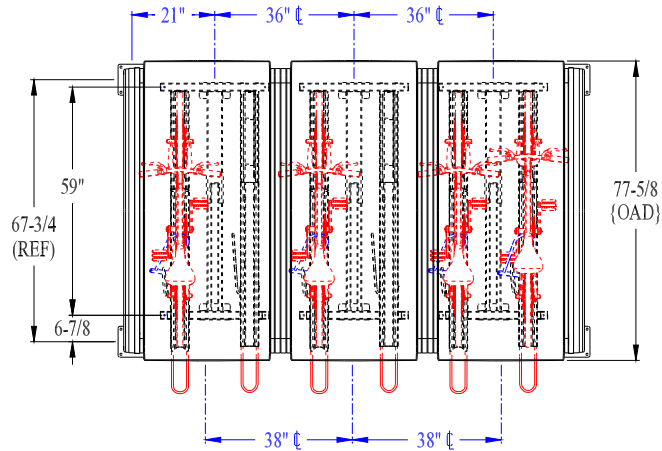


See View A




View A
3:1

{12-Bike} Capacity Shelter
with (3) W-Racks

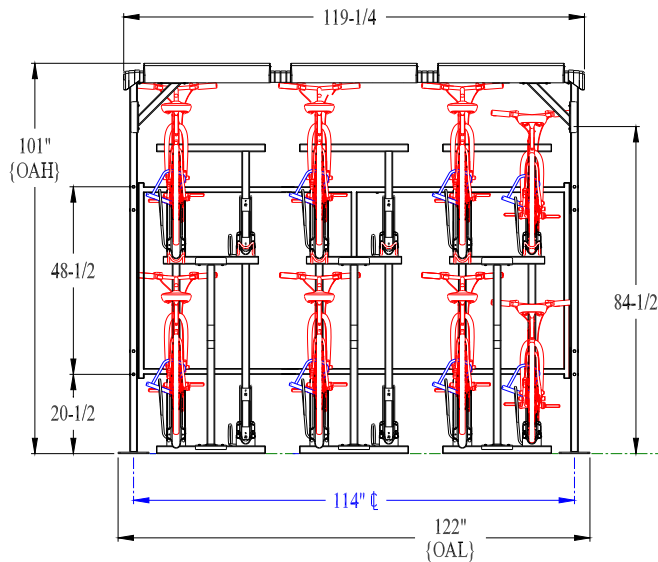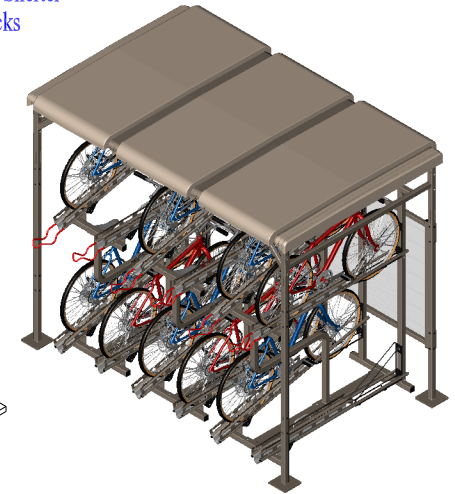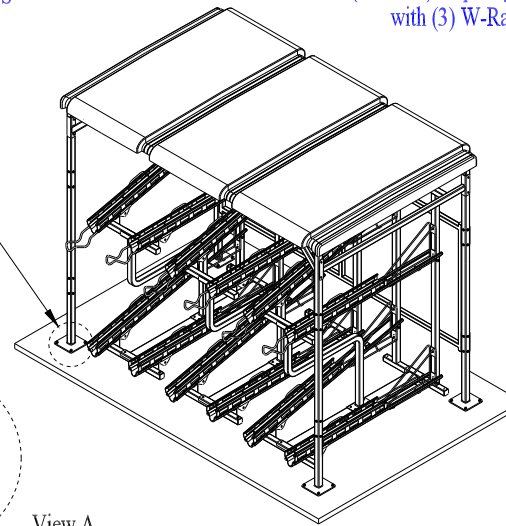

GROUND
LEVEL

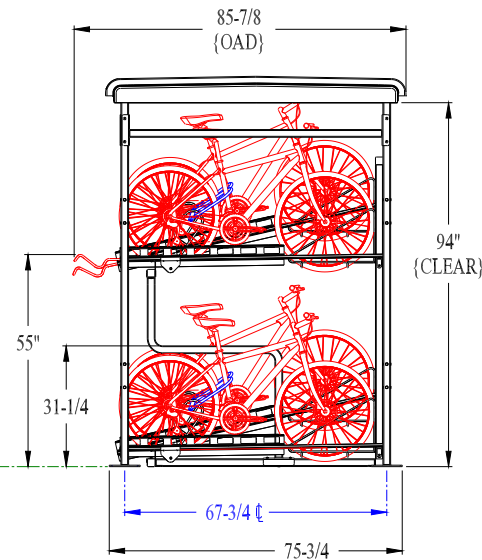

SHELTER CONTRUCTION IS COMPRESSION MOLDED SMC
FIBERGLASS TOPS WITH ABS SOFFETS, POWDER COATED
STEEL FRAMES & POLYCARBONITE SIDE PANELS

STANDARD COLORS ARE TAUPE FRAMES & SANDSTONE
TOPS & SOFFETS. OTHER COLORS AVAILABLE

SHELTERS ARE AVAILABLE IN (2) TOP & (3) TOP STARTERS
WITH ADDITIONAL (2) TOP & (3) TOP ADDERS COMBINED
TO CREATE UP TO A (24) TOP SHELTER BANK

(3) HD-RACKS HAVE TUBULAR STEEL POWDER COATED
FRAMES WITH 3/8" Ø POWDER COATED STEEL ROD
WALL-RACKS & PVC WHEEL GUIDES

STAINLESS STEEL WALL-RACKS ARE ALSO AVAILABLE

SHIPPING WEIGHT IS 1413 LBS. OR 641 KG.

SHEET 1 OF 1	A	RELEASE FOR QUOTE		10/26/18
	REV	DESCRIPTION		DATE
TOLERANCES UNLESS OTHERWISE SPECIFIED: +/-	CYCLEPORT {3-TOP} ASSEMBLY {D-SHELTER}			
			Cycle Safe 5211 CASCADE ROAD - SUITE 210 GRAND RAPIDS, MI 49546 www.cyclesafe.com	
	BOB SLYH	10/26/18		
	CHECKED	DATE		
	APPROVED	DATE		
.X .030	REV D		{1-SIDE} POLYCARBONITE (HD-RACKS)	REV A
.XX .010				
.XXX .005				
ANGLE 1/2"				