



MOUNTING DIM'S
ON CONCRETE
BASE PAD


See View A




View A
3:1

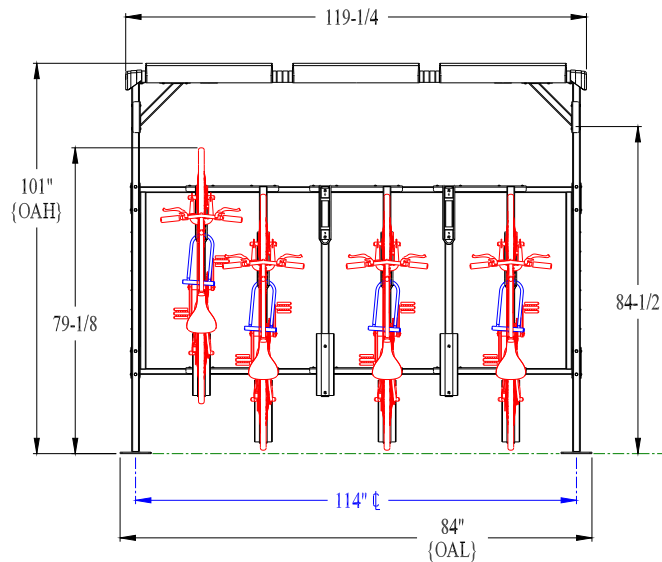

GROUND
LEVEL

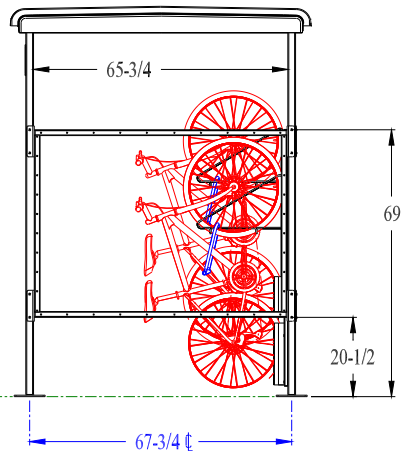

{6-Bike} Capacity Shelter
with (6) W-Racks

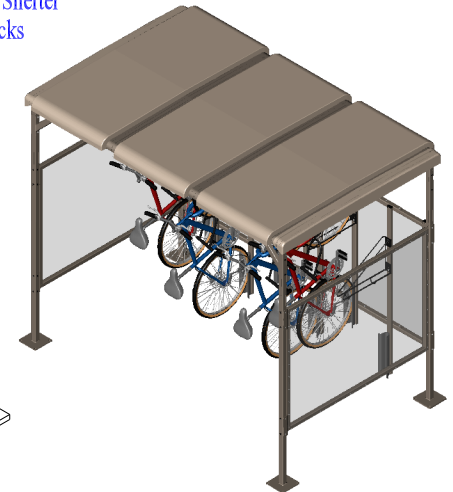

SHELTER CONTRUCTION IS COMPRESSION MOLDED SMC
FIBERGLASS TOPS WITH ABS SOFFETS, POWDER COATED
STEEL FRAMES & POLYCARBONITE SIDE PANELS

STANDARD COLORS ARE TAUPE FRAMES & SANDSTONE
TOPS & SOFFETS. OTHER COLORS AVAILABLE

SHELTERS ARE AVAILABLE IN (2) TOP & (3) TOP STARTERS
WITH ADDITIONAL (2) TOP & (3) TOP ADDERS COMBINED
TO CREATE UP TO A (24) TOP SHELTER BANK

(6) W-RACKS HAVE TUBULAR STEEL POWDER COATED
FRAMES WITH 3/8" Ø POWDER COATED STEEL ROD
WALL-RACKS & PVC TIRE GUARDS

STAINLESS STEEL WALL-RACKS ARE ALSO AVAILABLE

SHIPPING WEIGHT IS 912 LBS. OR 414 KG.

SHEET 1 OF 1	A	RELEASE FOR QUOTE		10/21/18
	REV	DESCRIPTION		DATE
TOLERANCES UNLESS OTHERWISE SPECIFIED: +/-	CYCLEPORT {3-TOP} ASSEMBLY {W-SHELTER}			
			Cycle Safe 5211 CASCADE ROAD - SUITE 210 GRAND RAPIDS, MI 49546 www.cyclesafe.com	
	BOB SLYH	10/21/18		
	CHECKED	DATE		
	APPROVED	DATE		
.X .030 .XX .010 .XXX .005 ANGLE 1/2"	REV D	{3-SIDE} POLYCARBONITE (W-RACKS)		REV A